

TPS

Bevel Tube Laser Cutting Machine

.... Company Culture



Intelligent manufacturing changes future

NALUES

Customer-focused and employee-based

SVISION

Become a respectable enterprise in the global metal forming equipment field

.... Company Profile



13

13 branches/subsidiaries/ sub-subsidiaries across the world





100+

Serve 100+countries and regions



4

Manufacturing Bases in China



30+

Global service outlets




8000+Sets of Annual Output



96000m² Occupied Area



Bevel Tube Laser Cutting Machine

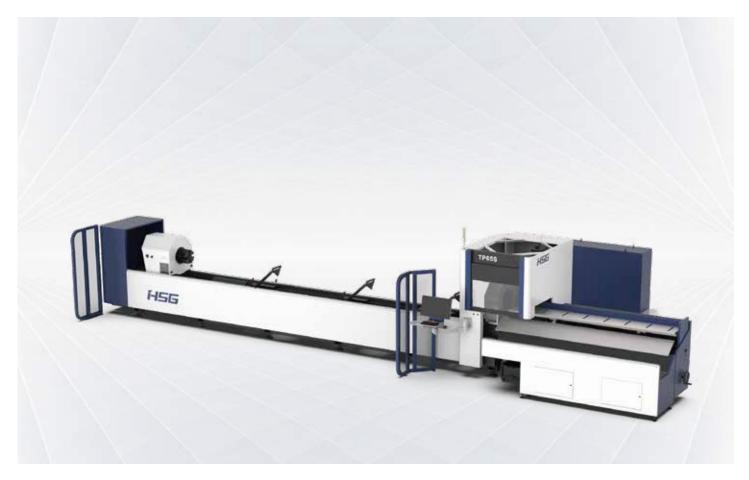

Technical Parameters

Power 3000W Rotating Speed of Chucks 120r/min No-load Speed 140m/min Acceleration 1.2G X/Y-axis Positioning Accuracy ±0.03mm/m (±0.00118") X/Y-axis Repositioning Accuracy ±0.03mm (±0.00118") *Tailing Length ≥220mm(8.66") Cutting Capacity Square tube□20*20 - □200*200(0.78"-7.87")
No-load Speed Acceleration 1.2G X/Y-axis Positioning Accuracy ±0.03mm/m (±0.00118") X/Y-axis Repositioning Accuracy ±0.03mm (±0.00118") *Tailing Length Pound tubeФ20 - Ф273mm(0.78"-10.74")
Acceleration 1.2G X/Y-axis Positioning Accuracy ± 0.03 mm/m (± 0.00118 ") X/Y-axis Repositioning Accuracy ± 0.03 mm (± 0.00118 ") *Tailing Length $\geqslant 220$ mm(8.66") Round tube $\Phi 20 - \Phi 273$ mm(0.78"-10.74")
X/Y-axis Positioning Accuracy ±0.03mm/m (±0.00118") X/Y-axis Repositioning Accuracy ±0.03mm (±0.00118") *Tailing Length ≥220mm(8.66") Round tubeΦ20 - Φ273mm(0.78"-10.74")
X/Y-axis Repositioning Accuracy ±0.03mm (±0.00118") *Tailing Length ≥220mm(8.66") Round tubeΦ20 - Φ273mm(0.78"-10.74")
*Tailing Length \$220mm(8.66") Round tubeФ20 - Ф273mm(0.78"-10.74")
Round tubeΦ20 - Φ273mm(0.78''-10.74'')
Rectangular diagonal ≤273mm(10.74")
Weight of Single Tube 200kg
Overall Dimensions(L*W*H) $12500\times4700\times2600\text{mm}(41.01'*15.41'*8.5')$ with Loading Racks
Optional TUV CE

 $^{{}^\}star \text{Only}$ in the case of straight cutting can it be achieved

^{*} Machine appearance, technical parameters, function description, data comparison shown in this page are from HSG in-house laboratory. All testing results and experimental data shall be subject to real machine.

High Speed and Intelligent for Better Processing

- High Speed and Precise
 High-speed data transmission without time delay and strong positional energy control.
- High rotational Speed and Air Velocity
 Bus system and servo motor reduce unproductive time.





X9000 Bus-based Tube Cutting Control System


- Simple Interface
 Clear interface is convenient for users operating and shows
 cutting data in real time to save time and costs.
- Functional Integration Control
 A number of core functions are showed centrally on the interface to reduce operating steps and users can easily learn to operate.

Intelligent Digital Chucks

- Closed-loop control and wireless data transmission in real time.
- Know claws clamping status and accurate tube size .
- Self-adaptive adjustment of clamping force.
- Stop immediately if empty or wrong tube is clamped, so as to lower work error rate.








Powerful Functions Make You Never Spend Time Worrying

 Component Real-time Monitoring and Maintenance Alert All components are detected in real time to ensure the stable use and the system is equipped with maintenance alert for careful component management

LA4 Bevel Cutting Head

• 0-45° bevel takes its shape once, for the convenience of subsequent welding and decrease of reprocessing costs.

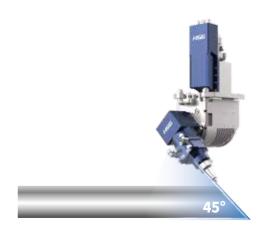




Tube Splicing Technology

 The operating control offers 50+ kinds of tube splicing patterns, for convenience of subsequent welding, such as splicing of male and female head of square tube, 90° arc splicing, splicing of round tube tee, splicing of cut-through holes, 45° splicing of hexagon, splicing of angle iron and channel steel, etc.


Machine Foundation *The marked size has about 10mm error

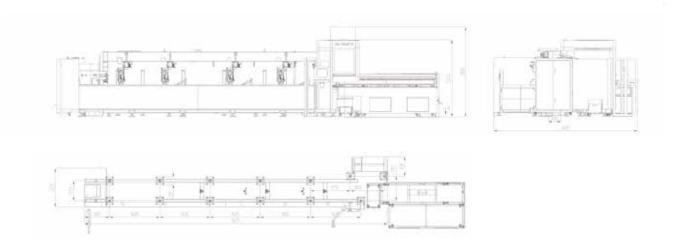

Cutting Samples



Cutting Capacity

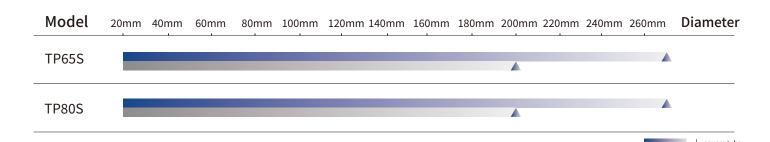





As a global enterprise, HSG sticks to providing professional and convenient service support to customers at home and board



Professional Training

Multiple technical training service and free operation training for customers and dealers in time



Efficient Support

Humanistic service model, online services and 7*24 hotline to offer solutions and assistance



Optimized Transport

Multi-channel transport solutions and professional transport solution team will provide various transport cases for to satisfy the demand of customers and save transports fees



Sufficient Accessories

Highly efficient accessories delivery service, multiple network inventory jointly responds to accessories demand to shorten customer's waiting times and accelerate production



Careful Services

Domestic door-to-door service and free proofing, global 100+dealers provide efficient and convenient services



Intelligent Manufacturing Changes Future



Wahsita



Facebook



Youtube

Headquarters Add.: No. 4, Anye Road, Shunjiang Community Industrial Park,

Beijiao Town, Shunde District, Foshan, Guangdong, China

Website: www.hsglaser.com Email: info@hsglaser.com Tel:+86 757-66833906